



WNY Micro Vacuum Liquid Pump Series User Guide

Issue 03
Date 2021-04

Hilintec

Copyright © Chengdu Hilin Technology Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Chengdu Hilin Technology Co., Ltd.

Trademarks and Permissions

Hilintec is a trademark of Chengdu Hilin Technology Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Chengdu Hilin Technology Co., Ltd. and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Chengdu Hilin Technology Co., Ltd.

Address: No.3663 Section 2 Muhua Road
Shuangliu District
Chengdu Sichuan China 610000

Website: <http://www.mini-pump.com>

Tel: +86-28-62567958

About This Document

Purpose

This document is related to the WNY micro vacuum liquid pump products, which is used to guide relevant technical personnel to initially understand the characteristics of the product.

Intended Audience

This document is intended for technical personnel. You should have a good understanding of your product and have a clear concept of the relevant parameters, specifications, and other information of the applications of the micro pump.

Keyword

Air-liquid dual use, PWM speed control, protection function, speed feedback, key parameters, operation instructions

Change History

The change history accumulates each update of this document. The latest version of the document contains all the previous updates.

Issue	Date	Product Version	Modification
01	20191106	1.0	First official release
02	20200424	2.0	Modify the parameter format
03	20210423	2.0	Add reliability parameter

Contents

About This Document	I
Change History	II
Contents	III
1 Characteristics	1
1.1 Gas-liquid Dual Purpose.....	1
1.2 Long lifespan,Low interference	1
1.3 Speed Control Function.....	
错误！未定义书签。	
1.4 Speed Feedback	2
1.5 Protections	2
1.6 Maintenance Free,Pollution-free Transmission	2
1.7 Good Corrosion Resistance.....	
错误！未定义书签。	
1.8 Unlimited Installation.....	
错误！未定义书签。	
2 Technical Specifications	1
2.1 Key Specifications	1
2.2 Reliability Parameters	2
2.3 Suction/Pressure Height Parameters	1
2.4 Versions Description	1
2.5 Working Conditions	2
2.6 Pump Materials	3
2.7 Filtering Problem	3
2.8 Noise and Silencer	3
2.9 Tube diameter	3
3 Electrical Connection	4
3.1 Signal Wire Description	4
3.2 Electrical Connection	6
3.3 Motor Schematic Diagram and Description of Peripheral Circuit	7
3.4 Description of Motor Starting Current	8

4 Cautions	9
5 Dimensions	10
6 Appearance	11

1

Characteristics



1. 1 Gas-liquid Dual Purpose

Liquid-gas dual-use, can be used as a liquid pump or a vacuum pump, can also be used to transfer gas-liquid mixed media; dry-run and self-priming

1. 2 Long Lifespan,Low Interference

This model is driven by brushless motors which have the advantages of long service life, low interference and high reliability.

1. 3 Speed Control Function

The motor speed can be changed and the flow can be adjusted by changing the duty cycle by inputting the PWM signal. Or by ordering Hilintec special speed controller (model: TS-C24 and TS-D12) for speed regulation.

1.4 Speed Feedback

The speed of the pump can be known through the speed feedback signal. From this, the operating status of the pump can be known, which is convenient for closed-loop control and makes the system more intelligent.

1.5 Protections

Equipped with overheating protection, overload protection(except the basic type), which to the greatest extent prevents accidental damage to the pump.

1.6 Maintenance Free,Pollution-free Transmission

There is no need to add lubricating oil and maintenance, and it does not pollute the medium.

1.7 Good Corrosion Resistance

The materials of the wetted parts: reinforced nylon and EPDM rubber, silicone rubber,which have certain corrosion resistance

1.8 Unlimited Installation

It can be installed in any direction

2 Technical Specifications

2.1 Key Specifications

Model	As a Vacuum Pump				As a Liquid Pump			Weight (g)
	Voltage (V DC)	Load current (mA)	Flow Rate (L/min)	Relative Vacuum (-kPa)	Voltage (V DC)	Load current (mA)	Free Flow Rate (Pure Water) (L/min)	
WNY600A	12	≤330	≥0.6	≥17	12	≤350	≥0.6	≈310
	24	≤200	≥0.8		24	≤260		
WNY1000A	12	≤380	≥0.9	≥27	12	≤500	≥1	
	24	≤220	≥1.1		24	≤280		

Note: 1. The input voltage requires $12V \pm 10\%$, $24V \pm 5\%$.

2. Different types of products have slightly different weights;

3. Unless otherwise specified, the technical parameters are measured under the conditions of temperature 20°C and standard atmospheric pressure of 101kPa .

4. The parameters in the table are measured at the maximum speed of the motor. When the motor speed changes, the pressure/vacuum level is basically unchanged.

4. The above parameters are measured under the configuration of standard PP plastic hose connectors. If other types of connectors are configured, the parameters may change slightly.

5. As a vacuum pump, the average flow rate in the table is the flow rate value measured with a soap film flow-meter. as a liquid pump, the flow rate is measured with a measuring cup.

2.2 Reliability Parameters

Model	Lifetime(Hrs)	Simplified Version	Standard Version	Premium Version
WNY600A WNY1000 A	Full-Load	3500	6000	10000
	No-Load	8000	12000	18000
	Motor	10000	15000	20000

Product lifetime test instructions:

1. Full-load life test conditions: block the pump suction port, and the exhaust port is directly connected to the atmosphere, so that the pump can operate continuously without stopping for 24 hours under the maximum vacuum condition;
2. No-load life test conditions : The pump suction port and exhaust hole are directly open to the atmosphere, so that the pump works under normal pressure for 24 hours without stopping and continuous operation;
3. Motor life test conditions: under good ventilation and heat dissipation conditions, the motor does not carry a load for 24 hours without stopping Continuous operation;
4. Environmental conditions for life test: In a clean, non-corrosive laboratory, the ambient temperature is 5~33℃ fluctuates with the climate, and the relative humidity of the environment is 50%~85%, fluctuates with the climate;
5. The source of the experimental data is from Hailin Technology Aging and life laboratory and supplier laboratory

2.3 Suction/Pressure Height Parameters

Model	Max. Suction Height H1 (m)	Flow Rate@ Max. Suction Height (mL/min)	Max. Pressure Height H2 (m)	Flow Rate@ Max. Pressure Height (mL/min)
WNY600 A	2	>300	4	>280
WNY100 0A	3	>400	5	>280

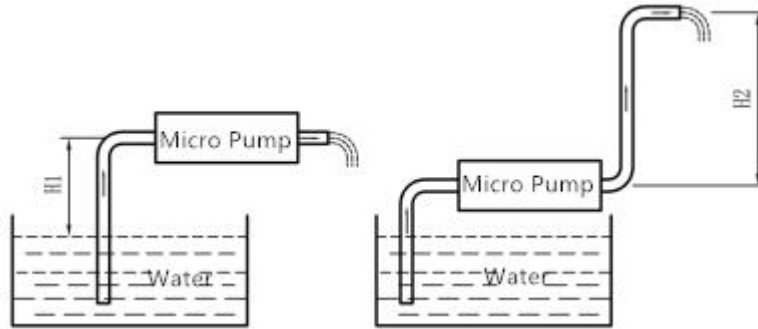


Figure 2-1 Suction/Pressure Height Schematic

Note: 1. The medium is clean water, and all the tubes are made of silicone hoses with an inner diameter of 5mm.

2. The definition of the maximum suction height H1 and the maximum pressure height H2 is shown in Figure 2-1

3. When test H1, the length of the suction tube is about $H1+200\text{mm}$; the length of the pressure tube is about 100mm. When test H2, the length of the suction tube is about 100mm; the length of the pressure tube is about $H2+200\text{mm}$.

4. This data is subject to change without notice.

2.4 Versions Description

According to different parts quality and quality control requirements, it is divided into three versions: simplified version, standard version, and premium version; the performance of different versions is different, and the differences are as follows:

Performance		Version		
		Simplified version	Standard version	Premium version
Configur ation	Motor quality	BLDC ★	BLDC ★★	BLDC ★★★★
	Diaphragm performance	★	★★	★★★★
	Bearing performance	★	★★	★★★★
	EMC	▲▲▲▲	▲▲▲	▲
	Ambient temperature	0~40℃	0~50℃	0~50℃
	Speed control function	YES	YES	YES
	Speed feedback signal	YES	YES	YES
	Overheating protection	No	YES	YES
	Overload protection	No	YES	YES
	Frequent start and stop parameters	Lifespan	>180,000times	> 800,000times
Test Condition s		Run 30sec Stop 30sec	Run 15sec Stop 15sec	Run 10sec Stop 10sec
		24hours continuously run and full-load work		
speed controller		12V equip with SC-D12, , 24V equip with SC-C24 Please pay attention to the voltages		

Note: 1. The more ★, the better performance of this item.

2. The less ▲, the lower EMC of this item

2.5 Working Conditions

1. Environment: This series of products can be divided into three types according to the working environment temperature: low temperature environment type, normal temperature environment type and high temperature environment type. If not specified, it is the normal temperature environment type. Low temperature environment type and high temperature environment type need to be customized. Such as WNY600A (high temperature environment type).

Type	Permissible medium temperature range	Cautions
low temperature environment (standard version, premium version)	-10°C ~ 50°C	It is forbidden to contain solid particles such as ice particles in the medium!
normal temperature environment (simplified version)	0°C ~ 40°C	
normal temperature environment (standard version)	0°C ~ 50°C	
normal temperature environment (premium version)	0°C ~ 50°C	
high temperature environment (standard version, premium version)	0°C ~ 55°C	

1. The permissible relative humidity of all pumps in this series is $\leq 90\%$, no condensation. The pump should not be exposed to the sun, and should work in a clean and ventilated environment.

2. Medium: The permissible gas medium is allowed to be rich in water vapor, but cannot contain particles. The permissible liquid medium cannot contain particles.

This series of products are divided into two types: normal temperature medium type and high temperature medium type according to the medium temperature that can be tolerated. If not specified, it is the normal temperature medium type. The high temperature medium type needs to be customized and specified, such as WNY600A (high temperature medium type).

Type	Permissible medium temperature range	Cautions
normal temperature medium (simplified version, standard version)	0°C ~ 50°C	It is forbidden to contain solid
high temperature medium (standard version, premium version)	0°C ~ 100°C	

premium version)		particles such as ice particles in the medium!
-------------------	--	--

When pumping high-temperature water, the space is crowded out due to the precipitation of gas in the water, which will reduce the suction flow.

3.Load: As a air pump,the suction port and exhaust port can run with full load (ie completely block the inlet and outlet), But the applied load pressure must be between the pump's maximum vacuum and maximum output pressure,as a liquid pump,the inlet can run at full load (completely blocked), and the outlet can be temporarily blocked.

2. 6 Pump Materials

- 1.The materials of the wetted parts: fiber reinforced nylon, EPDM rubber, silicone rubber,All materials have certain corrosion resistance, Please check the chemical resistance and compatibility of the medium according to the wetted material.
2. The material of the plastic parts of the pump body is fiber reinforced nylon, and the material of the shock absorb foot is PVC.

2. 7 Filtering problem

When the pump works for a period of time, the solid impurities contained in the pump cavity, which will destroy the air tightness of the pump and reduce the flow rate and vacuum degree. A filter must be installed at the pump inlet. the gas that we generally think is very clean which still contains dust impurities, and it also needs to be filtered to ensure the normal operation of the precision air-tight components inside the pump. After the filter is used for a period of time, the resistance increases due to the adhesion of impurities, which makes the flow rate and vacuum degree of the system decrease significantly, and the filter should be replaced immediately. Filter life depends on the cleanliness of the media.

2. 8 Noise and Silencer

Choose high-end pump, less noise. When there is a large air flow through the pump, the noise is louder, and the noise will be reduced when the pumping is close to a vacuum. Connecting the silencer to the piping system will have a certain effect.

According to the specific conditions of the pipeline system, the noise reduction effect is different.

2.9 Tube diameter

The size of the matching silicone tube: the inner diameter is about 5mm, and the outer diameter is about 9mm

3 Electrical Connection

3.1 Signal Wire Instruction

S. N	Wire	Function	Signal Definition	Description
1	White	Control motor start and stop	$2V \leq \text{start} \leq 5V$ $0V \leq \text{stop} \leq 0.8V$	This signal wire can be used to control the start and stop of the pump, especially for frequent start and stop. If this wire is not used, it must be insulated and wrapped. If the pump is not working for a long time, the red power wire should be disconnected.
2	Blue	Pulse Width Modulation (PWM)	$0V \leq \text{start} \leq 0.8V$ $2V \leq \text{stop} \leq 5V$	Change the motor speed and adjust the flow by changing the duty ratio. It is recommended that the frequency of the PWM input signal be set within this range: 20kHz to 30kHz. You cannot use this port to control the start and stop of the pump.
3	Yellow	FG feedback signal(The motor speed feedback signal, pulse signal). the motor outputs 6 pulses per rotation.	$V_{IL} < 0.5V$; $V_{IH} < 6V$, It is recommended to take a high level=5V. The maximum rated current of FG signal is 2mA	The inside of the motor is open-drain status, so it needs to be pulled up externally. Voltage 5V, resistance 5.1kΩ.
4	Orange	Special control wire. Not useful for this product.	This wire should be connected to the negative pole of the power supply.	
5	Black	Power wire, negative pole.		

6	Red	Power wire, positive pole, +12V(±10%); if choose 24V, connect +24V(±5%)		
---	-----	---	--	--

Warning: Hot swap is prohibited! It is strictly forbidden to connect or disconnect the motor wire while the power is on! All connection or disconnection must be carried out with the power supply completely cut off! Otherwise it will burn the motor! Do not connect the positive and negative poles in reverse, otherwise the motor will be burned!

If there is no need for speed adjustment and speed feedback, you can connect wires as follows

Motor Wire	connection method	Remark
Red	Positive pole of power supply. Voltage strictly follow wiring instructions!	For "yellow" and "white" versions, if you do not need speed control and speed feedback, please insulate and wrap them separately.
Blue	negative pole	
Orange		
Black		

3.2 Connection Instruction

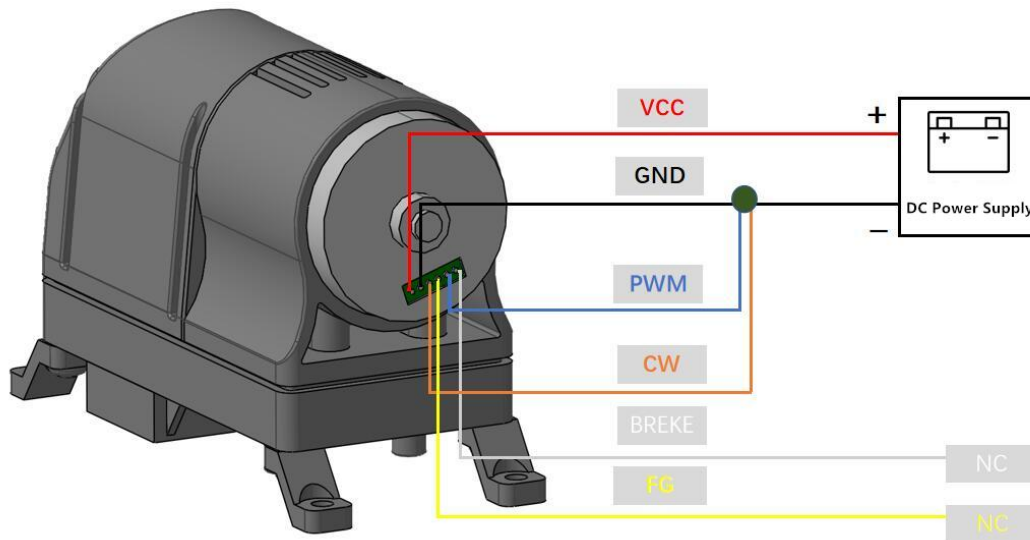


Figure 3-1 Wiring Instructions for constant speed Type

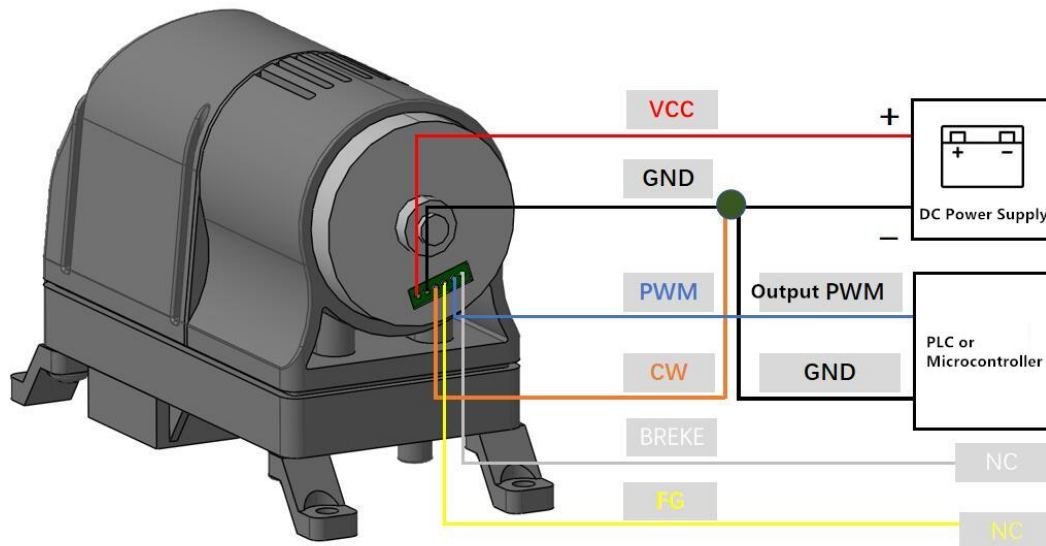


Figure 3-2 Wiring Instructions for Speed Control Type

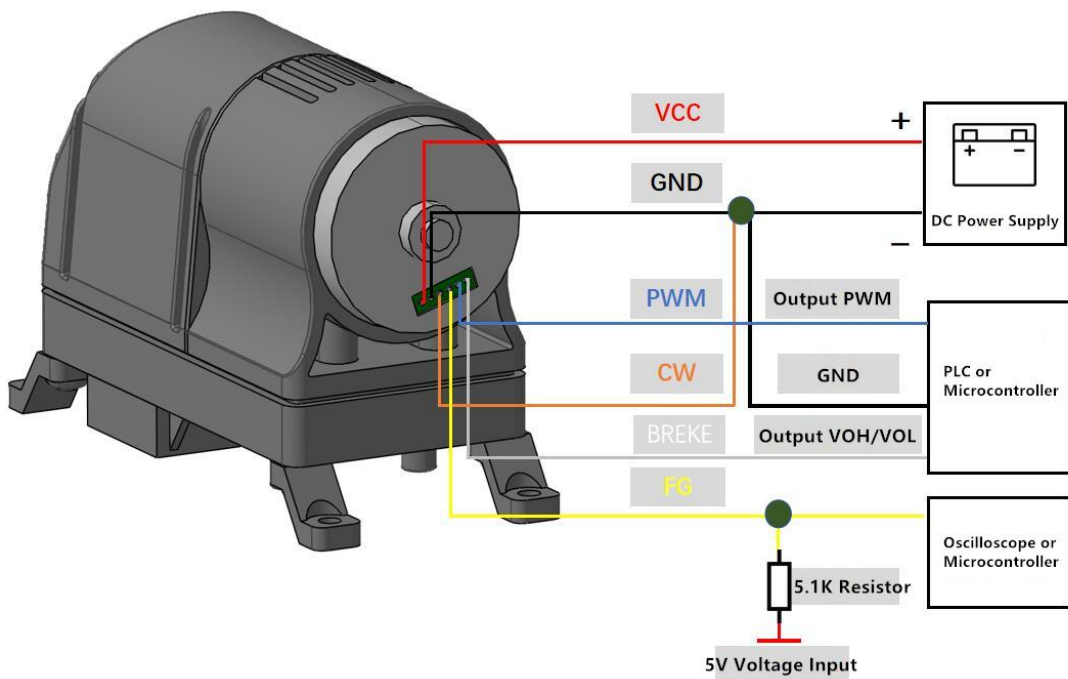


Figure 3-3 Wiring Instructions for PWM Speed Control Type,FG Feedback

3.3 Motor Schematic Diagram and Description of Peripheral Circuit

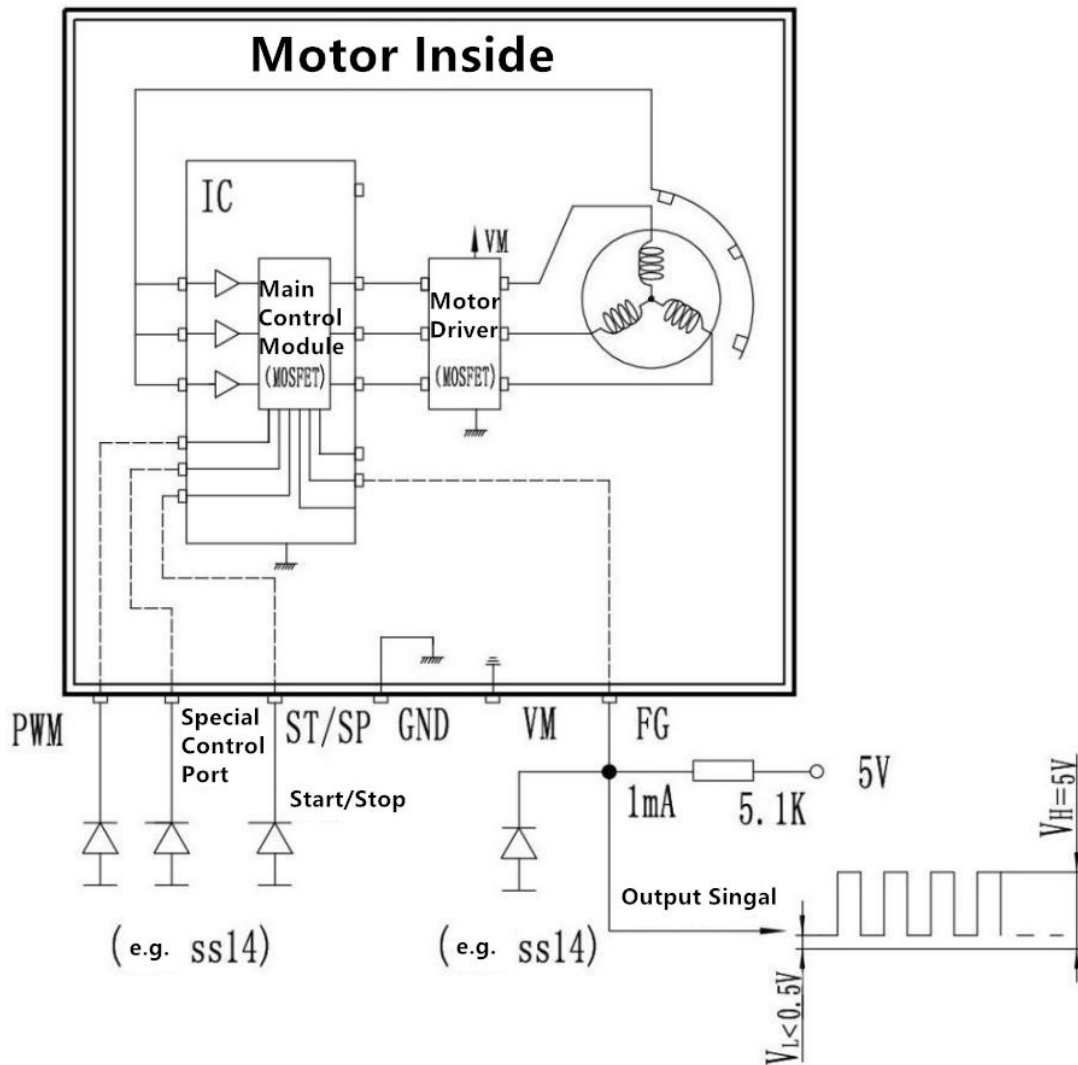


Figure 3-4 Motor Schematic Diagram

1. Several ports (as shown in the figure) must be connected to Schottky diodes. Because of the function control and drive inside the motor are all MOS tubes, and their input impedance is very high. Schottky diodes must be connected to prevent accidental serial connection of the ports. A large interference signal breaks down the MOS tube.
2. Requirements for control level: $0V \leq V_{IL} \leq 0.8V$, $2V \leq V_{IH} \leq 5V$.
3. The FG port is the motor speed feedback signal. In application, it should be noted that the FG signal output terminal is open-drain, and the user needs to connect a pull-up resistor, as shown in the figure, which is an application example

3.4 Starting Current Curve

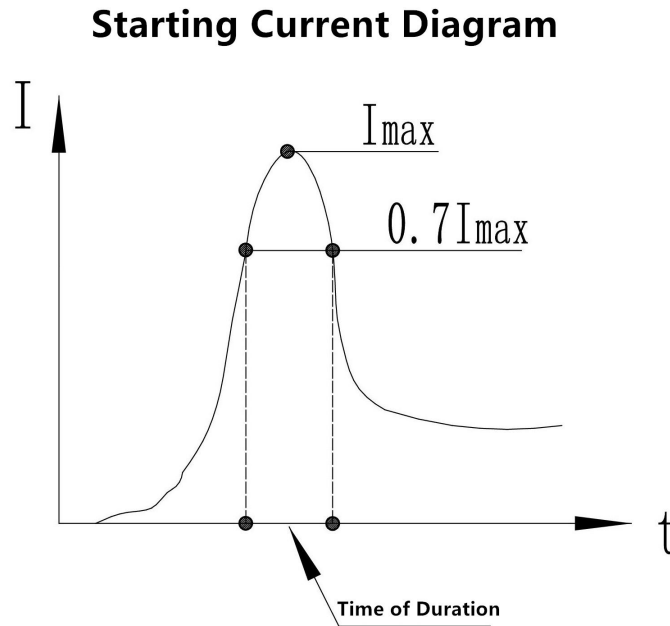


Figure 3-5 Starting Current Curve

1. The maximum starting current of this series is 3A, and the duration $< 10\text{ms}$.
2. The starting current of the motor is the maximum current generated when the motor is in a static state and the rated voltage is suddenly turned on. This current is a basic parameter of the motor determined by the motor manufacturer.
3. When the motor is turned on during use, other auxiliary circuits, such as speed regulation, control, etc., will be turned on at the same time, which will generate additional inrush current superimposed on the starting current of the motor, which will increase the starting current a lot. .

Therefore, users who have limited starting current should control the "start/stop" function terminal of the motor when they need to control the start and stop of the pump, but cannot control the on-off of the current.

4 Cautions




Please read the instructions in this chapter carefully and follow the instructions strictly before use.

1. As a air pump,the suction port and exhaust port can run with full load (ie completely block the inlet and outlet),as a liquid pump,the inlet can run at full load (completely blocked), and the outlet can be temporarily blocked. prolonged block can damage the pump.
2. This product has no waterproof, dust-proof, and explosion-proof functions and cannot be used in flammable and explosive environments!
3. Foreign matter must not fall into the hydraulic connectors, and there should be no solid particles in the medium, otherwise the micro pump will be damaged!
4. When this product is used to transfer harmful medium, it must be double-sealed to ensure personal safety!
5. The matching piping components and containers must have sufficient strength to ensure personal safety!
6. Built-in precision control circuit, need to use high-quality DC power supply to power the pumps!
7. Hot swap is prohibited! It is strictly forbidden to connect or disconnect the motor wire while the power is on! All connection or disconnection must be carried out with the power supply completely cut off! Otherwise it will burn the motor! Do not connect the positive and negative poles in reverse, otherwise the motor will be burned!
8. Users should take anti-static measures!
9. Please follow the instructions strictly!

5 Dimensions

Unit:mm

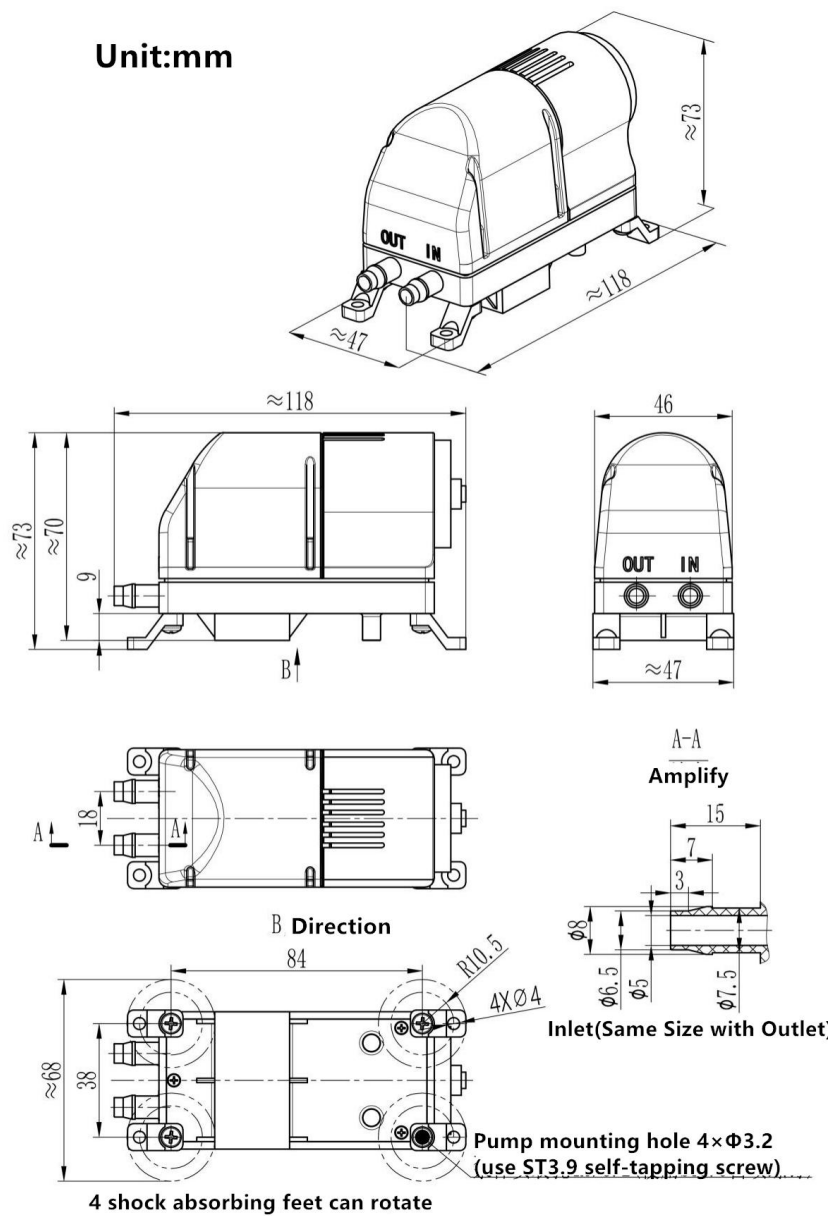

Installation instructions:

The mounting holes are self-tapping screw holes, not suitable for repeated tightening and disassembly, otherwise the installation will be loose and unreliable.

6 Appearance

